

INDUSTRIAL C-245 SERIES MODIFIED MOLDED BLOCK CARTRIDGES



C-245 Series Modified Molded Block Filter Cartridges offer the same benefits as other modified molded block products while providing even greater chlorine taste & odor reduction and the highest sediment reduction levels found in a carbon cartridge.

C-245 Series products are modified molded blocks manufactured using our proprietary Fibredyne technology. This technology creates a unique filter media by attaching powdered activated carbon onto a cellulose-free synthetic fiber matrix. The result is a single cartridge that combines the benefits of both a sediment filter and a carbon block.

Advantages of this technology include low pressure drop over the entire life of the cartridge and up to two times the chlorine taste & odor and dirt holding capacity of traditional carbon blocks.*

**Based on manufacturer's internal testing.*

FEATURES/BENEFITS

Up to two times the chlorine taste & odor reduction and dirt-holding capacity of traditional blocks

Combines the benefits of both a sediment filter and a carbon block into a single cartridge

Post-filtration layer fused to the carbon/fiber media blend ensures fines will not be released into the effluent stream

Fibredyne technology creates a unique filter media by attaching powdered activated carbon onto a cellulose-free synthetic fiber matrix

Manufactured entirely from FDA-compliant materials

Available in 2.6" (67 mm) diameter

Nominal 5-10 micron rating

APPLICATIONS

Commercial
Food Service
Industrial
Residential Water



COMPONENT

Tested and Certified by NSF International to NSF/ANSI Standard 42 for material requirements only.

CARTRIDGE SPECIFICATIONS

MODEL	MAX. DIMENSIONS	μ (NOMINAL)	INITIAL PSI @ FLOW RATE	CHLORINE TASTE & ODOR REDUCTION @ FLOW RATE*	CASE QUANTITY
C-245X10T	2.63" x 9.75" (67mm x 248mm)	5	1.6 psi @ 1.0 gpm (0.1 bar @ 3.8 Lpm)	>10,000 gallons @ 1 gpm (>37,800 L @ 3.8 Lpm)	30
C-245X20T	2.63" x 20" (67mm x 508mm)	5	1.6 psi @ 2.0 gpm (0.1 bar @ 7.6 Lpm)	>20,000 gallons @ 2 gpm (>75,700 L @ 7.6 Lpm)	30
C-245X30T	2.63" x 30" (67mm x 762mm)	5	1.6 psi @ 3.0 gpm (0.1 bar @ 11.4 Lpm)	>30,000 gallons @ 3 gpm (>113,500 L @ 11.4 Lpm)	30
C-245X40T	2.63" x 40" (67mm x 1,016mm)	5	1.6 psi @ 4.0 gpm (0.1 bar @ 15.2 Lpm)	>40,000 gallons @ 4 gpm (>151,400 L @ 15.1 Lpm)	12


*Based on manufacturer's internal testing
Custom configurations available. Please contact customer service.

Filter Media	Bonded PAC
Endcaps	Polypropylene
Netting	Polyethylene
Gaskets	Santoprene
Temp. rating	40° -180° F (4.4° -82.2° C)

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

NOTE: Performance capacity depends on system design, flow rate and certain other application conditions. Certain states require system registration and certification for health-related contaminant reduction using the water. Cartridges will contain a very small amount of carbon fines (very fine black powder). After installation, a new cartridge should be flushed with sufficient water to remove all traces of fines prior to using the water. Micron ratings based on 85% or greater removal of given particle size. Estimated capacity using 2 ppm free available chlorine at 0.5 ppm breakthrough.

PRESSURE DROP VS FLOW RATE

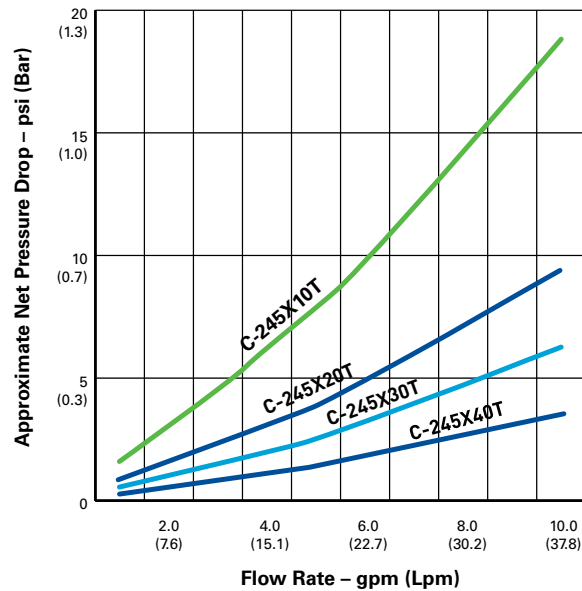

FILTRATION & PROCESS

5730 NORTH GLEN PARK ROAD, MILWAUKEE, WI 53209
P: 262.238.4400 | F: 262.238.4404 | WWW.PENTAIRINDUSTRIAL.COM | CUSTOMER CARE: 800.279.9404

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

4002998 Rev D NV14 © 2014 Pentair Residential Filtration, LLC. All rights reserved.